iCLASS® Prox embeddable Card Ordering Guide

The ***iCLASS*** Prox embeddable contactless smart card offers read/write and HID proximity capability in a single card. Personalize the card with a contact smart chip module, photo ID, magnetic stripe, barcode, or anti-counterfeiting element.

Base Model ☐ *203 Standard PVC* ☐ *213* Composite PVC/Polyester*

** Composite Card is 25% Polyester and 75% PVC.*

iCLASS Memory Size and Allocation (Check One)

- ☐ 0 - 2k Bits (256 Bytes) with 2 Application Areas
- ☐ 1 - 16k Bits (2k Bytes) with 2 Application Areas
- ☐ 2 - 16k Bits (2k Bytes) with 16 Application Areas
- ☐ 3 - 32k Bits (4K Bytes) Application areas 16k/2+16k/1
- ☐ 4 - 32k Bits (4K Bytes) Application areas 16k/16+16k/1

Programming (Check One)

- ☐ N - Non-Configured, Non-Programmed ***iCLASS*** & 125 kHz Proximity**.** Programming Information Not Required.
- ☐ C - Configured, Non-Programmed ***iCLASS*** & 125 kHz Proximity**.** Programming Information Not Required.
- ☐ A - Configured, Non-Programmed ***iCLASS***, Programmed 125 kHz Proximity**.** Specify Programming Information.
- ☐ P - Programmed ***iCLASS*** only. Specify Programming Information.
- ☐ L - Programmed 125 kHz Proximity only. Specify Programming Information.
- ☐ B - Programmed 125 kHz Proximity and ***iCLASS***. Specify Programming Information.

12345 = Card ID Number
YYYYYYYY-YY = Sales Order No.

Front Packaging (Check One)

- ☐ G - Plain White with Gloss Finish
- ☐ C - Custom Artwork/Contact Module with Gloss Finish – Specify Custom Artwork/Contact Module Number[1]

Back Packaging (Check One)

- ☐ G - Plain White with Gloss Finish[2]
- ☐ C - Custom Artwork with Gloss Finish – Specify Custom Artwork Number[1]
- ☐ 1 - Plain White with Gloss Finish with Magnetic Stripe[2]
- ☐ 3 - Custom Artwork with Gloss Finish with Magnetic Stripe - Specify Custom Artwork Number[1]

iCLASS Card Numbering[3] (Check One)

- ☐ M - Sequential Matching Internal/External (Inkjetted)
- ☐ N - No External Card Numbering
- ☐ S - Sequential Internal/Sequential Non-Matching External (Inkjetted)
- ☐ R - Random Internal/Non-Matching Sequential External (Inkjetted)
- ☐ A - Sequential Matching Internal/External (Laser Engraved)[4]
- ☐ B - Sequential Internal/Sequential Non-Matching External (Laser Engraved)[4]
- ☐ C - Random Internal/Non-Matching Sequential External (Laser Engraved)[4]

Slot Punch[5] (Check One)

- ☐ N - No Slot Punch (Printed location of vertical slot punch will remain)
- ☐ V - Vertical Slot Punch

125 kHz Card Numbering[3] (Check One)

- ☐ M - Sequential Matching Internal/External (Inkjetted)
- ☐ N - No External Card Numbering
- ☐ S - Sequential Internal/Sequential Non-Matching External (Inkjetted)
- ☐ R - Random Internal/Non-Matching Sequential External (Inkjetted)
- ☐ A - Sequential Matching Internal/External (Laser Engraved)[4]
- ☐ B - Sequential Internal/Sequential Non-Matching External (Laser Engraved)[4]
- ☐ C - Random Internal/Non-Matching Sequential External (Laser Engraved)[4]

Optional Custom Artwork[1]

☐ _____ (*Specify Artwork Number – Refer to the Custom Artwork Forms for new Artwork*)

Optional Contact Smart Chip Module (Front or Back side)

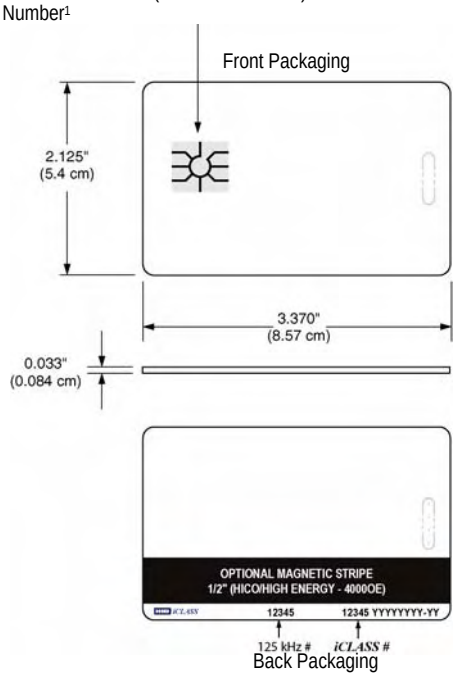

Please enter your final card options from check boxes above. Example: 2030BGGMNM

Final Part Number									-	*(Optional Artwork #)*

iCLASS Programming Information

Bit Numbers _____ (*example: 26 bit*)
Format Number _____ (*example: H10301*)
Facility Code _____
(Custom Formats) Site Code _____ City Code _____
OEM Code _____
Internal Card No. Start _____ Stop _____
External Card No. Start _____ Stop _____
PIN: ☐ Sequential: Start # _____ ☐ Random: Length _____

125 kHz Programming Information

Bit Numbers _____ (*example: 26 bit*)
Format Number _____ (*example: H10301*)
Facility Code _____
(Custom Formats) Site Code _____ City Code _____
OEM Code _____
Internal Card No. Start _____ Stop _____
External Card No. Start _____ Stop _____
Special Instructions: _____

For Contact Smart Chip selection, please refer to the "Contact Smart Card Request For Quotation" on page 15 of this document. Standard configuration does not include a contact smart chip module.

[1] For new artwork files, contact Customer Service for custom artwork number, lead-times, and cost. [2] Cards ordered with plain white front and back packaging, or custom artwork, will still have a small "HID logo" "HID" and reference number printed in the lower left-hand corner and a slot punch target printed on the back of the card. [3] The external card number is placed in the bottom right-hand corner for ***iCLASS*** 13.56 MHz and in bottom center for 125 kHz Proximity on the back of the card. [4] For Laser Engraved external numbers, consult factory for lead times and cost. [5] Cards are provided with an optional slot punch at no additional charge. Some video imaging printers cannot accommodate pre-slot punched cards. Please consult with the printer manufacturer prior to ordering.

© 2007 HID Global Corporation. All rights reserved