



1431 - HID Proximity & MIFARE® Card Ordering Form

Please ensure each required option has been checked with the appropriate choice to fulfill a completed order form.

* 1431 Base Model

Part Number Worksheet

(* = Required Fields)

* Programming (Check One)

- L - Programmed, (125 kHz only with HID Format)⁶. Specify Programming Information.
- M - Programmed, (13.56 MHz only with HID Format)^{4, 6}. Specify Programming Information.
- B - Programmed, (125kHz and 13.56 MHz with HID Format)^{4, 6}. Specify Programming Information.
- N - Non-Programmed (125 kHz & 13.56 MHz without HID Format)⁶. Programming Information Not Required.

* Front Packaging (Check One)

- G - Plain White PVC with Gloss Finish
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number¹
- E - Contact Module Embeddable Plain Gloss White Finish

* Back Packaging (Check One)

- G - Plain White PVC with Gloss Finish²
- S - Standard HID Proximity & MIFARE Artwork²
- 1 - Plain White PVC with Gloss Finish with Magnetic Stripe²
- C - Custom Artwork with Gloss Finish - Specify Custom Artwork Number^{1, 2}

* 125 kHz Proximity Card Numbering³ (Check One)

- M - Sequential Matching Internal/External (Inkjetted)
- N - No External Card Numbering
- S - Sequential Internal/Sequential Non-Matching External (Inkjetted)
- R - Random Internal/Non-Matching Sequential External (Inkjetted)
- A - Sequential Matching Internal/External (Engraved)⁴
- B - Sequential Internal/Sequential Non-Matching External (Engraved)⁴
- C - Random Internal/Non-Matching Sequential External (Engraved)⁴

* Slot Punch⁵ (Check One)

- N - No Slot Punch (Printed location of vertical slot punch will remain)
- V - Vertical Slot Punch

* 13.56 MIFARE Card Numbering³ (Check One)

- M - Sequential Matching Internal/External (Inkjetted)
- N - No External Card Numbering
- S - Sequential Internal/Sequential Non-Matching External (Inkjetted)
- R - Random Internal/Non-Matching Sequential External (Inkjetted)
- A - Sequential Matching Internal/External (Engraved)⁴
- B - Sequential Internal/Sequential Non-Matching External (Engraved)⁴
- C - Random Internal/Non-Matching Sequential External (Engraved)⁴

Optional Custom Artwork¹

- _____ (Specify Artwork Number - Refer to the Custom Artwork Forms for new Artwork)

Please enter your final card options from check boxes above. Example: 1431NGGNNN

* Final Part Number	1431									-	(Optional Artwork #)
---------------------	------	--	--	--	--	--	--	--	--	---	----------------------

* 125 kHz Programming Information


Bit Numbers _____ (example: 26 bit)
 Format Number _____ (example: H10301)
 Facility Code _____
 (Custom Formats) Site Code _____ City Code _____
 OEM Code _____
 Internal Card No. Start _____ Stop _____
 External Card No. Start _____ Stop _____
 Special Instructions: _____

* 13.56 MHz Programming Information

Bit Numbers _____ (example: 26 bit)
 Format Number _____ (example: H10301)
 Facility Code _____
 (Custom Formats) Site Code _____ City Code _____
 OEM Code _____
 Internal Card No. Start _____ Stop _____
 External Card No. Start _____ Stop _____
 Special Instructions: _____

For Contact Smart Chip selection, please refer to the "Contact Smart Card Request For Quotation" on page 14 of this document. Standard configuration does not include a contact smart chip module.

¹ For new artwork files, contact Customer Service for custom artwork number, lead-times, and cost. ² Cards ordered with plain white front and back packaging, with no HID artwork or with custom artwork, will still have a small "HID logo" and reference number printed in the lower left-hand corner and a slot punch target printed on the back of the card. ³ The external card number is placed in the bottom left-hand corner (125kHz) and in the bottom right-hand corner (13.56 MHz) on the back of the card on Proximity Programming only. Permanent unique MIFARE 32 Bit serial # cannot be printed on cards. ⁴ For Laser Engraved external numbers, consult factory for lead times and cost.. ⁵ Cards are provided with an optional slot punch at no additional charge. Some video imaging printers cannot accommodate pre-slot punched cards. Please consult with the printer manufacturer prior to ordering. ⁶ Includes a permanent Unique MIFARE 32 Bit Serial number.

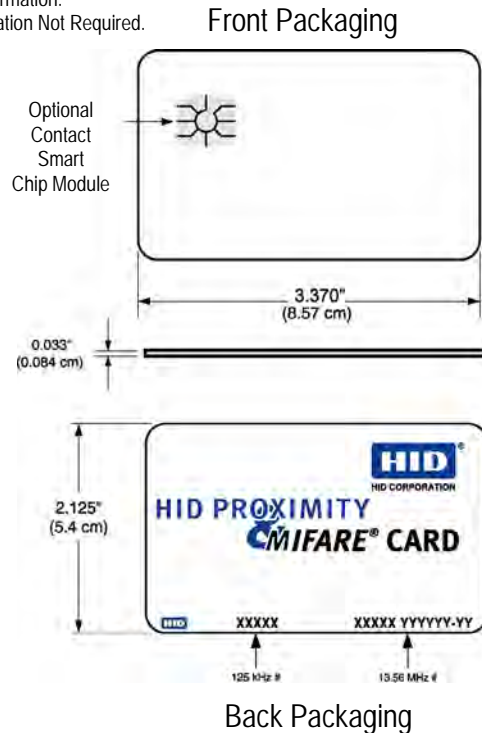

XXXXX = Card ID Number
 YYYYYY-YY = Sales Order Number